20

Garden & Underwater

Pages 547-574

MR16 | GU10 | E27 | LED | COB LED

Die cast | Natural aluminium | Stainless steel | Acrylic | Metal | Teak

IP43 IP44 IP54 IP65 IP68

LED Garden Spots

7070/W

7070 | 5W | SMD 2835 | Plastic

Supplied with spike & base.

new

IP65

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

7070/C



7068 | 6W | COB LED | Die cast

IP65

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

Supplied with spike.



67456 | 3W | COB LED | Aluminium

Supplied with spike.

IP67

LED BUILT IN · 90 CRI · ADJUSTABLE · DIMMABLE · CE · 3 YEAR



67458 | 8W | SMD 2835 | Aluminium

Supplied with spike.

IP65

LED BUILT IN · 80 CRI · ADJUSTABLE · DIMMABLE · CE · 2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7070/C	Black	Cool white	4000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7070/W	Black	Warm white	3000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7068/B/W	Black	Warm white	3000K	6W	380lm	40°	230V		200cm	30	Complete with driver
67456/B/W	Black	Warm white	3000K	3W	170lm	36°	350mA		200cm	36	Requires 350mA driver
67458/B/W	Black	Warm white	3000K	8W	520lm	38°	24V DC		200cm	50	Requires 24V DC driver

67198G | 35W | MR16 | GU10 | Aluminium

ADJUSTABLE

2 YEAR

IP65

Supplied with spike.



67198AG | 35W | MR16 | GU10 | Aluminium

ADJUSTABLE

2 YEAR

IP65

Supplied with spike
& 400mm pole stand.

67464G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

3 YEAR

new

IP65

Supplied with spike.

Order Code	Colour	Watts	Input	Class			Notes
67198G/AN	Anthracite	35W	100-240V		150cm	12	-
67198G/B	Black	35W	100-240V		150cm	12	-
67198AG/AN	Anthracite	35W	100-240V		150cm	6	-
67464G/B	Black	10W	100-240V		200cm	12	-

The 10W COB Garden Spots

Aluminium

A-A++ 7046/W/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

Supplied with spike.



A-A++ 7046/AN/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

Supplied with spike.



A-A++ 7046/AL/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7046/W/W	White	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 200mA driver
7046/AN/W	Anthracite	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 200mA driver
7046/AL/W	Aluminium	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 200mA driver

The 20W COB Garden Spots

Aluminium

A-A++ 7047/W/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

Supplied with spike.

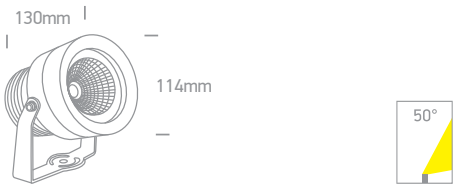

A-A++ 7047/AN/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

Supplied with spike.

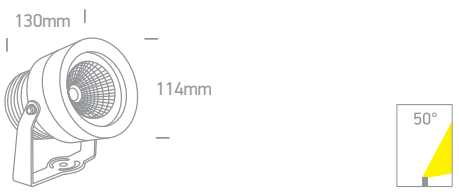

A-A++ 7047/AL/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

Supplied with spike.

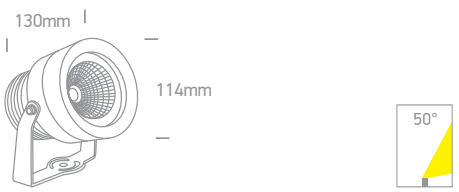

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7047/W/W	White	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver
7047/AN/W	Anthracite	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver
7047/AL/W	Aluminium	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver

67196C/AN/W

67196BG/G

67196BG/W

The GU10 Garden Round Spots

Die cast

E-A++ 67196BG/W

67196BG | 35W | MR16 | GU10 | Die cast

ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with spike.



E-A++ 67196BG/AN

67196BG | 35W | MR16 | GU10 | Die cast

ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with spike.



E-A++ 67196BG/G

67196BG | 35W | MR16 | GU10 | Die cast

ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67196BG/W	White	35W	100-240V		150cm	6	-
67196BG/AN	Anthracite	35W	100-240V		150cm	6	-
67196BG/G	Grey	35W	100-240V		150cm	6	-

The Garden Round Spots

Die cast

67196A | 3W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · 2 YEAR · IP65

Supplied with spike.



67196B | 6W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · 2 YEAR · IP65

Supplied with spike.



67196C | 9W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · 2 YEAR · IP65

Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67196A/AN/W	Anthracite	Warm white	3000K	3W	240lm	35°	100-240V		150cm	12	Complete with 350mA driver
67196B/AN/W	Anthracite	Warm white	3000K	6W	450lm	35°	230V		150cm	6	Complete with 500mA driver
67196C/AN/W	Anthracite	Warm white	3000K	9W	700lm	35°	230V		150cm	6	Complete with 250mA driver

Garden Spots

Stainless steel

7008L | 3x1W | LED | Stainless steel 304

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with base & spike.



7008A | 35W | MR16 | GU10 | Stainless steel 316

ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with base & spike.



7010 | 80W | PAR38 | E27 | Stainless steel 304

ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with base & spike.

7010A | 80W | PAR38 | E27 | Stainless steel 316

ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with base & spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
7008L/W	Stainless steel	Warm white	3000K	3x1W	245lm	230V	⏚	100cm	18	Complete with driver
7008A	Stainless steel	-	-	35W	-	100-240V	⏚	200cm	20	-
7010	Stainless steel	-	-	80W	-	100-240V	⏚	200cm	8	-
7010A	Stainless steel	-	-	80W	-	100-240V	⏚	200cm	8	-

7052B | 1W | COB LED | Die cast

new
LED BUILT IN
80 CRI
ADJUSTABLE
IP65
2 YEAR

Optional spike.
Order code 7010P.



67432 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE
2 YEAR
IP65

Supplied with spike.



7052 | 7W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
IP65
2 YEAR

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7052B/AN/W	Anthracite	Warm white	3000K	1W	80lm	40°	24V DC		100cm	36	Requires 24V DC driver
67432/B	Black	-	-	10W	-	-	100-240V		-	2	-
7052/AN/W	Anthracite	Warm white	3000K	7W	550lm	47°	100-240V		100cm	12	Complete with driver

Solar Path Light

67428 | 2,2W | LED | Solar powered | Sensor | Die cast

LED BUILT IN

80 CRI

IP54

2 YEAR

Supplied with spike.

LED 100% when movement detected.
LED 15% when no movement detected.

PIR Sensor: Distance up to 6m and within angle 120°
Charging time: 6-8Hrs (solar)
Working time: 2,5-3Hrs in 100% LED brightness
20-25Hrs in 15% LED brightness

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
67428/AN/W	Anthracite	Warm white	3000K	2,2W	200lm	4	1x2200mAh lithium battery

67462/B/W

67428/AN/W

Rechargeable Path Light

67462 | 3W | LED | Rechargeable | Die cast

EU charger included.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67462/B/W	Black	Warm white	3000K	3W	190lm	III	4	2x2200mAh lithium battery

The E27 Tube Lights

Die cast

67094 | 20W | E27 | Die cast

IP54



67098 | 2x20W | E27 | Die cast

IP54



Order Code	Colour	Watts	Input	Class		Notes
67094/AN	Anthracite	20W	100-240V		12	-
67094/B	Black	20W	100-240V		12	-
67094/G	Grey	20W	100-240V		12	-
67094/BR	Rust brown	20W	100-240V		12	-
67098/AN	Anthracite	2x20W	100-240V		12	-
67098/G	Grey	2x20W	100-240V		12	-
67098/BR	Rust brown	2x20W	100-240V		12	-

The E27 Tube Lights

Die cast

67090 | 15W | E27 | Die cast

IP54 | 2 YEAR



67092 | 15W | E27 | Die cast

IP54 | 2 YEAR



67100/B

67100 | 20W | E27 | Die cast

IP54 | 2 YEAR

67100/AN

67100/G

67100/BR



67102/B

67102 | 20W | E27 | Die cast

IP54 | 2 YEAR

67102/AN

67102/G

67102/BR



Order Code	Colour	Watts	Input	Class		Notes
67090/G	Grey	15W	100-240V		12	-
67092/G	Grey	15W	100-240V		6	-
67100/AN	Anthracite	20W	100-240V		4	-
67100/B	Black	20W	100-240V		4	-
67100/G	Grey	20W	100-240V		4	-
67100/BR	Rust brown	20W	100-240V		4	-
67102/AN	Anthracite	20W	100-240V		4	-
67102/B	Black	20W	100-240V		4	-
67102/G	Grey	20W	100-240V		4	-
67102/BR	Rust brown	20W	100-240V		4	-

67180/G

67182/G

67182/AN

The Mushroom Range

67180 | 15W | E27 | Die cast + plastic

IP44

Suitable for E27 LED lamp.



67182/AN

67182 | 15W | E27 | Die cast + plastic

IP44

Suitable for E27 LED lamp.



67182/G

67182 | 15W | E27 | Die cast + plastic

IP44

Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67180/G	Grey	15W	100-240V		4	-
67182/AN	Anthracite	15W	100-240V		4	-
67182/G	Grey	15W	100-240V		4	-

67250 | 2x3W | LED | Die cast

DARK LIGHT
IP54
offer

LED BUILT IN

2 YEAR





67250A | 2x3W | LED | Natural aluminium

DARK LIGHT
IP54

LED BUILT IN

2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67250/G/D	Grey	Daylight	6000K	2x3W	230V		8	Complete with driver
67250A/AL/W	Aluminium	Warm white	3000K	2x3W	230V		4	Complete with driver

The Natural Aluminium Bollards

67270 | 16W | E27 | Natural aluminium + acrylic

IP54

Suitable for E27 LED lamp.



67236 | 15W | E27 | Natural aluminium

IP54

Suitable for E27 LED lamp.



67236A | 15W | E27 | Natural aluminium

IP54

Suitable for E27 LED lamp.



67238 | 15W | E27 | Natural aluminium

IP54

Suitable for E27 LED lamp.



67238A | 15W | E27 | Natural aluminium

IP54

Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67270/AL	Aluminium	16W	100-240V		10	-
67236/AL	Aluminium	15W	100-240V		4	-
67236A/AL	Aluminium	15W	100-240V		4	-
67238/AL	Aluminium	15W	100-240V		10	-
67238A/AL	Aluminium	15W	100-240V		4	-

The 1W LED Bollards

Natural aluminium + acrylic

67234 | 1W | LED | Natural aluminium + acrylic

LED BUILT IN

2 YEAR

IP54



67234A | 1W | LED | Natural aluminium + acrylic

LED BUILT IN

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67234/AL/D	Aluminium	Daylight	6000K	1W	230V		10	Complete with driver
67234/AL/W	Aluminium	Warm white	3000K	1W	230V		10	Complete with driver
67234A/AL/W	Aluminium	Warm white	3000K	1W	230V		4	Complete with driver

LED Garden Path Lights

Die cast

67470 | 10W | LED | Die cast

new

IP65

LED BUILT IN

80 CRI

CE

2 YEAR



67470A | 10W | LED | Die cast

new

IP65

LED BUILT IN

80 CRI

CE

2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67470/B/W	Black	Warm white	3000K	10W	500lm	100-240V		6	Complete with 260mA driver
67470A/B/W	Black	Warm white	3000K	10W	500lm	100-240V		6	Complete with 260mA driver

LED Garden Path Lights

Die cast

67460A | 8W | LED | Aluminium

1-side light.

LED BUILT IN

80 CRI

2 YEAR

new

IP54



67460B | 2x6W | LED | Aluminium

2-side light.

LED BUILT IN

80 CRI

2 YEAR

new

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67460A/AN/W	Anthracite	Warm white	3000K	8W	640lm	100-240V	⏚	4	Complete with 350mA driver
67460B/AN/W	Anthracite	Warm white	3000K	2x6W	2x500lm	100-240V	⏚	4	Complete with 350mA driver

one

LED Path Light

Die cast

67358 | 7W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67358/AN/W	Anthracite	Warm white	3000K	7W	262lm	49°	100-240V	⏚	8	Complete with 700mA driver

The LED Bollards Range

Die cast

67036 | 12W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67034/G/W

67034 | 15W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54

67034/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Lumen (lm)	Input	Class		Notes
67036/G/W	Grey	Warm white	3000K	12W	50°	450lm	100-240V		4	Complete with driver
67034/AN/W	Anthracite	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver
67034/G/W	Grey	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver

The LED Bollards Range

Cone reflector

67410 | 12W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67410/AN/C	Anthracite	Cool white	4000K	12W	1000lm	230V	⏚	2	Complete with 250mA driver
67410/AN/W	Anthracite	Warm white	3000K	12W	1000lm	230V	⏚	2	Complete with 250mA driver

The LED Bollards Range

Cone reflector

67410A | 20W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

3 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67410A/AN/C	Anthracite	Cool white	4000K	20W	1600lm	230V	⏚	2	Complete with 250mA driver
67410A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V	⏚	2	Complete with 250mA driver

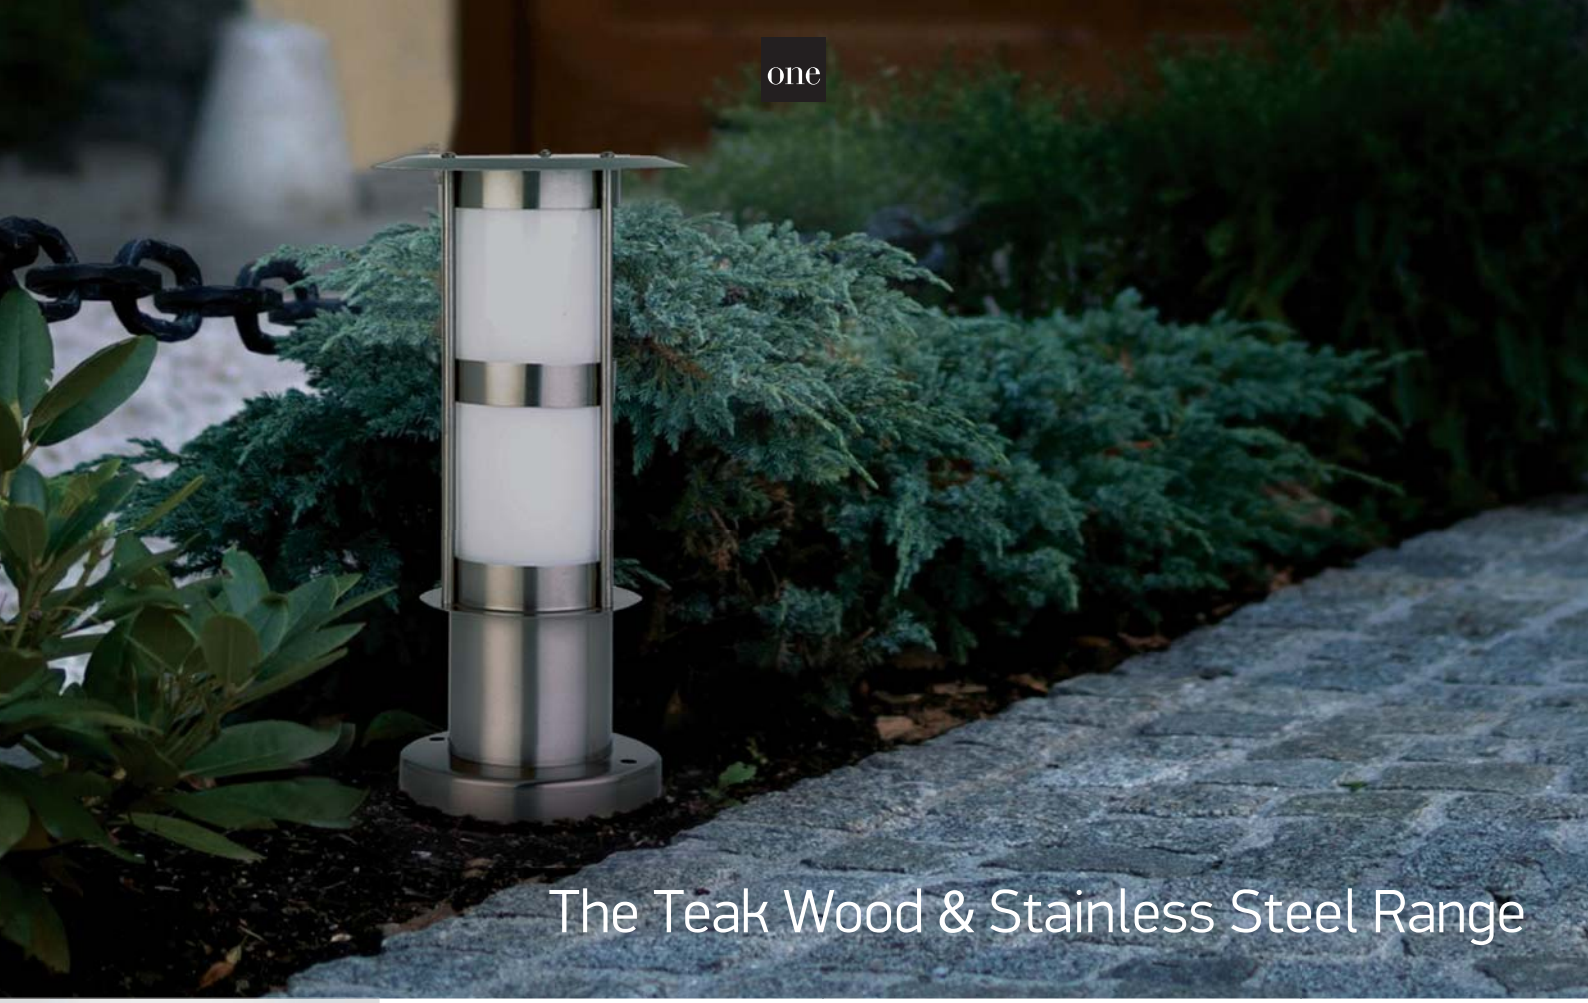

The Teak Wood & Stainless Steel Range

67010W | 15W | E27 | Teak + stainless steel

IP44



67286 | 15W | E27 | Teak + stainless steel 316

IP44



67004 | 15W | E27 | Stainless steel 201

IP44

offer



Order Code	Colour	Watts	Input	Class		Notes
67010W	Teak + stainless steel	15W	100-240V		6	-
67286	Teak + stainless steel	15W	100-240V		4	-
67004	Stainless steel	15W	100-240V		12	-

Retro Wall Lantern

67408 | 40W | E27 | Metal + glass



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67408/B	Black	40W	100-240V		4	-

The Romantic Outdoor Range

E-A++ 67406/B

67406 | 40W | E27 | Stainless steel 201 + tempered glass

IP43

67406/W



E-A++ 67406A/B

67406A | 40W | E27 | Stainless steel 201 + tempered glass

IP43

67406A/W



E-A++

67406B | 2x40W | E27 | Stainless steel 201 + tempered glass

IP43

Suitable for E27 LED lamps.



E-A++ 67406C/B

67406C | 40W | E27 | Stainless steel 201 + tempered glass

IP43

67406C/W



Order Code	Colour	Watts	Input	Class		Notes
67406/W	White	40W	100-240V		4	-
67406/B	Black	40W	100-240V		4	-
67406A/W	White	40W	100-240V		4	-
67406A/B	Black	40W	100-240V		4	-
67406B/B	Black	2x40W	100-240V		4	-
67406C/W	White	40W	100-240V		4	-
67406C/B	Black	40W	100-240V		4	-

E-A++ 67406D/B

67406D | 2x40W | E27 | Stainless steel 201 + tempered glass

IP43

67406D/W



E-A++ 67406E/B

67406E | 40W | E27 | Stainless steel 201 + tempered glass

IP43

67406E/W



Order Code	Colour	Watts	Input	Class		Notes
67406D/W	White	2x40W	100-240V		2	-
67406D/B	Black	2x40W	100-240V		2	-
67406E/W	White	40W	100-240V		4	-
67406E/B	Black	40W	100-240V		4	-

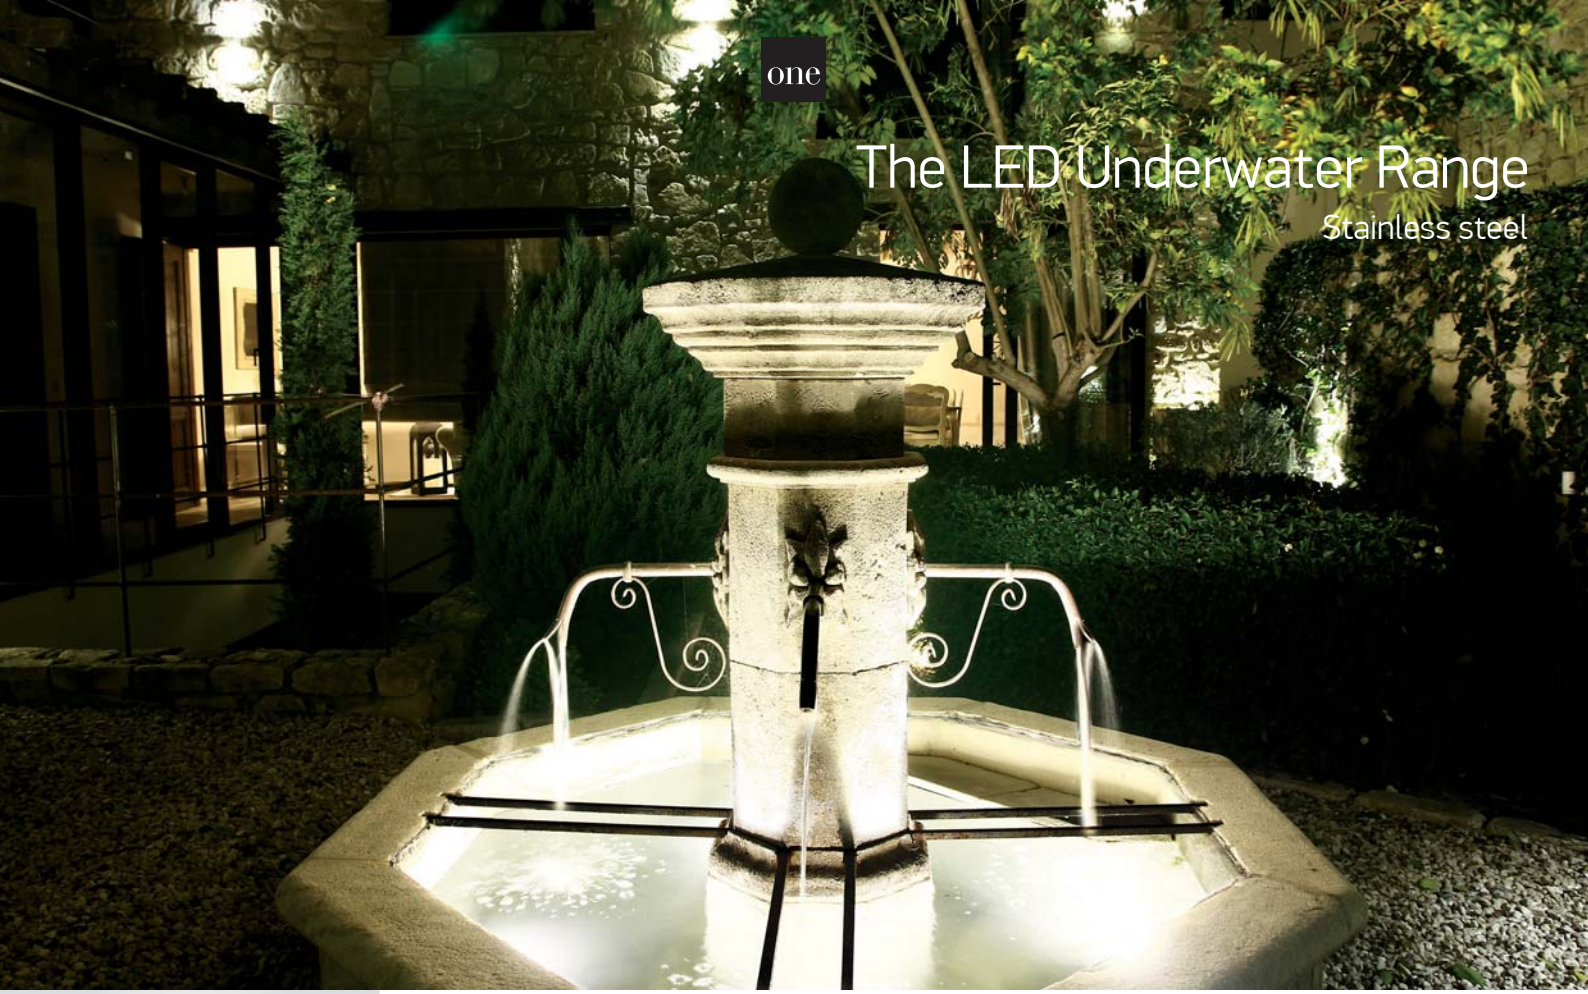

The LED Underwater Range

Stainless steel

69032 | 3W | LED | Stainless steel 316

Underwater only.



69036 | 12W | LED | Stainless steel 316

Underwater only.



69034 | 12W | LED | Stainless steel 316

Underwater only.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
69032/C	Stainless steel	Cool white	4000K	3W	150lm	30°	24V DC		300cm	8	Requires 24V DC driver
69036/C	Stainless steel	Cool white	4000K	12W	1100lm	25°	24V DC		300cm	4	Requires 24V DC driver
69034/C	Stainless steel	Cool white	4000K	12W	545lm	30°	24V DC		300cm	4	Requires 24V DC driver